



双螺旋锥形混合机 DOUBLE SCREW CONICAL MIXER



粉体混合 动态料仓 干燥 加液混合 冷却/加热
powder mixing, dynamic silo, drying, mixing with spray, cooling/heating,

TEL: 86-021-69176576 69176577

上海市嘉定区南翔高科技园区 (胜辛南路399号)

Number .399, South Shengxin Road, Nanxiang High-tech Garden,
Jiading District, Shanghai City, China

升立机械
粉体技术实业专家

组件选配

Accessory selection



齿轮-蜗轮组合
Gear and worm



双级摆线针轮
Double cycloidal



齿轮-摆线组合
Gear-cycloidal



球面阀
Ball valve



底部支撑
Bottom support



错位阀
Dislocation valve



温控夹套
Thermostat jacket



盘管夹套
Pip jacket



筒内衬氟
F inside



搅拌器耐磨
Anti-friction agitator

加液喷雾
Liquid nozzles



DSH锥形混合机

DSH Conical Screw Mixer



功能特点：
 双螺旋锥形混合机应用于温和搅拌与出料无残留效果要求的混合工艺。此外，这种混合机还能起临时混合的中间储存作用。
 锥形混合机适用于粉体，晶体，粒状及其配合加液的搅拌工艺，其混和的搅拌来源于低能耗，配置低功率电机亦能达到混合均匀的效果。锥形混合设备产生热量极少，且能保证无残留自动的出料。

Function:
 DSH conical screw mixer was characteristic of gentle and residue-free material discharge. Furthermore, conical screw mixer is suitable for intermediate material storage combined with temporary blending. Conical screw mixer is fit for mixing of powder, granule, crystallization, agglomeration, mixing with spraying liquid etc.



结构特征：
 双螺旋锥形混合机是一种高效的对流混合机。它能够温和地混合产品，在不损坏物料的前提下保证高精度的混合。自悬臂悬挂下来的两根不同旋转半径、不同长度的螺旋在锥形筒体内做三维公转运动，与此同时，两根螺旋还做自转运动。

Description:
 Double screw conical mixer is convection mixer of high efficiency. It has characteristic of gentle, high accuracy mixing and no damage to product. Two screws suspended from a turning arm, with different rotation semi diameter and different length make three-dimensional revolution action; meantime, two screws make self rotation.

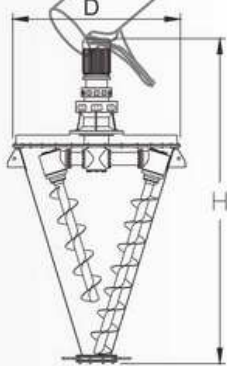


规格型号 specification	DSH-0.3	DSH-0.5	DSH-1	DSH-2	DSH-3	DSH-4	DSH-6	DSH-10	DSH-15	DSH-20	DSH-30
有效容积(M ³) working capacity	0.18	0.3	0.6	1.2	1.8	2.4	3.6	6	9	12	18
批次最大产量(KG) working capacity	200	300	650	1200	1800	2500	3600	6000	9000	12000	18000
公转自转(r/min) revolution / rotation	3.5/120	3.5/120	3/78	3/78	3/78	1.8/65	1.6/65	1/65	1/65	1/44	1/44
驱动功率(KW) power	3	3	4	5.5	7.5	11	15	18.5	22	37	45
设备重量 weight	500	600	1200	1500	2300	2520	3700	3980	4500	5500	6800
D	φ950	φ1150	φ1580	φ1950	φ2170	φ2280	φ2560	φ3000	φ3450	φ3770	φ4100
H	2060	2350	2840	3500	3760	4360	4800	5900	6680	6700	7500

以上为标准型设备参数，非标准型设备参数参照设备图纸。
 The above is the parameter for standard equipment, Non-standard equipment please refer to the drawing.

小型简易生产流程示意
以及配套设备

Simple production line
& related machine

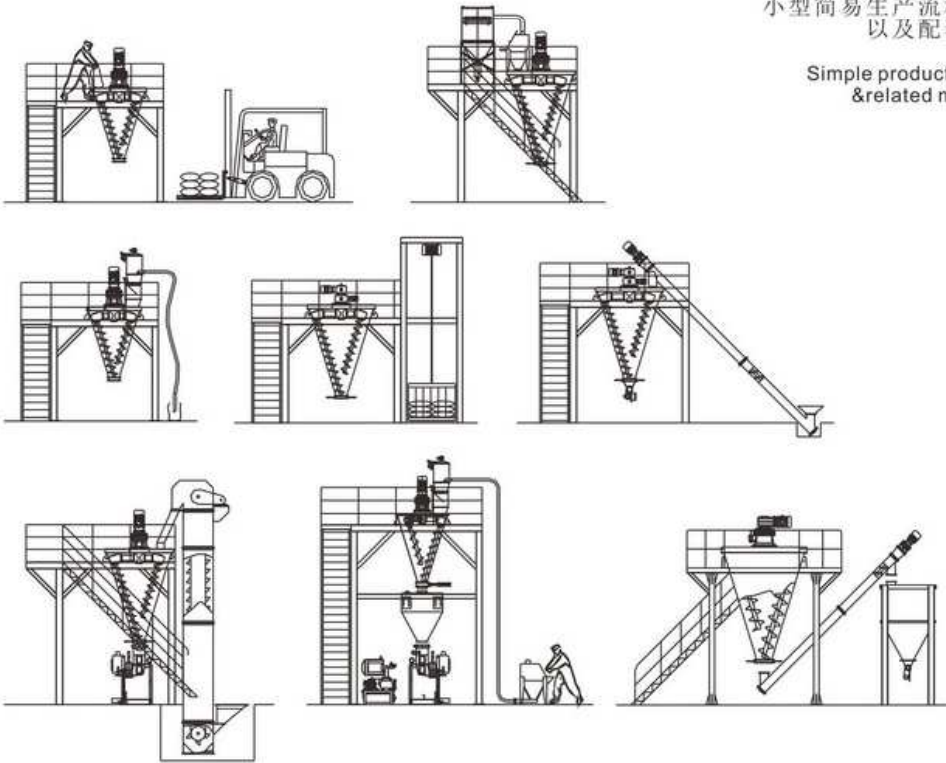

PC ХІЙБ»
Vacuum conveyor



GLS ВРКЛ»
Screw conveyor



±ЛОБЖ
Variable speed feeder



DC «Діиж
Dust collector



ііНБХ
Dust proof feeder



НСВ «ЧПЧ»
Automatic packer



ДСВ «РРЧ»
Bulk-bag packer



РРРБХ
Bulk-bag dischargers

